

Triaxis Rotor Sub

The Triaxis Rotor Sub is used above the PC Pump to eliminate premature failure of the standard pup joint which is normally run in this position and is used as a handling sub.

The eccentric motion of the PC Pump rotor causes these failures resulting in costly early work overs.

In this situation the pump must also be brought to surface to replace the worn pup joint available models are Pin x Pin or Box x Pin

- Machined to work in 2-7/8 and 3-1/2 elevators for log stators
- Heavy Wall construction 3 time heavier the standard tubing for rotor wear
- Reduced workover and pump changes
- Less chance of stator failure by surfacing the pump
- High Abrasion resistance
- Less rotor head wea – Also shows Rotor spacing on Failure Analysis
- Longer pump run life
- Available 2-7/8 73mm 3-1/2 88.9mm

TriaxisOilTools.com


sales@triaxisoiltools.com

+1 780.933.4773

Triaxis Oil Tools, Inc.

Nisku, Alberta

©2023 Triaxis Oil Tools Inc., All rights reserved.

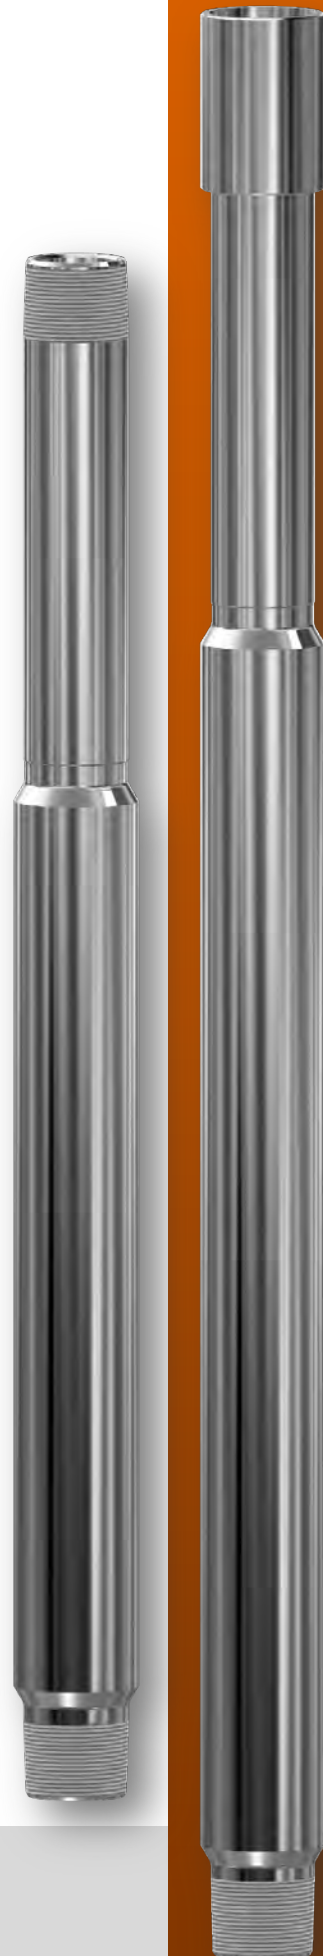

DS23-011 R00