




Triaxis Tork Swages

- The Tork swage is used above PC Pumps where Pump Vibration , Harmonics and rod wear causes failure to normal J55 swages
- Fishneck Tork Swage is used to crossover above stator allows exact grapple engagement
- Spear Collar above the Pump for Internal Fishing or higher Torque connections
- Tag Bar Tork Swage used to connect Anti-Rotation Tools Below Stator providing additional Torque strength
- Heavy Wall Body Design
- To be used with a Rotorsub
- Available material L80 and P110
- Special order on additional sizes
- Corrosion resistant Coating ie: nickel
- Available in 2-3/8 60mm, 2-7/8 73mm and 3-1/2 88.9mm EUE

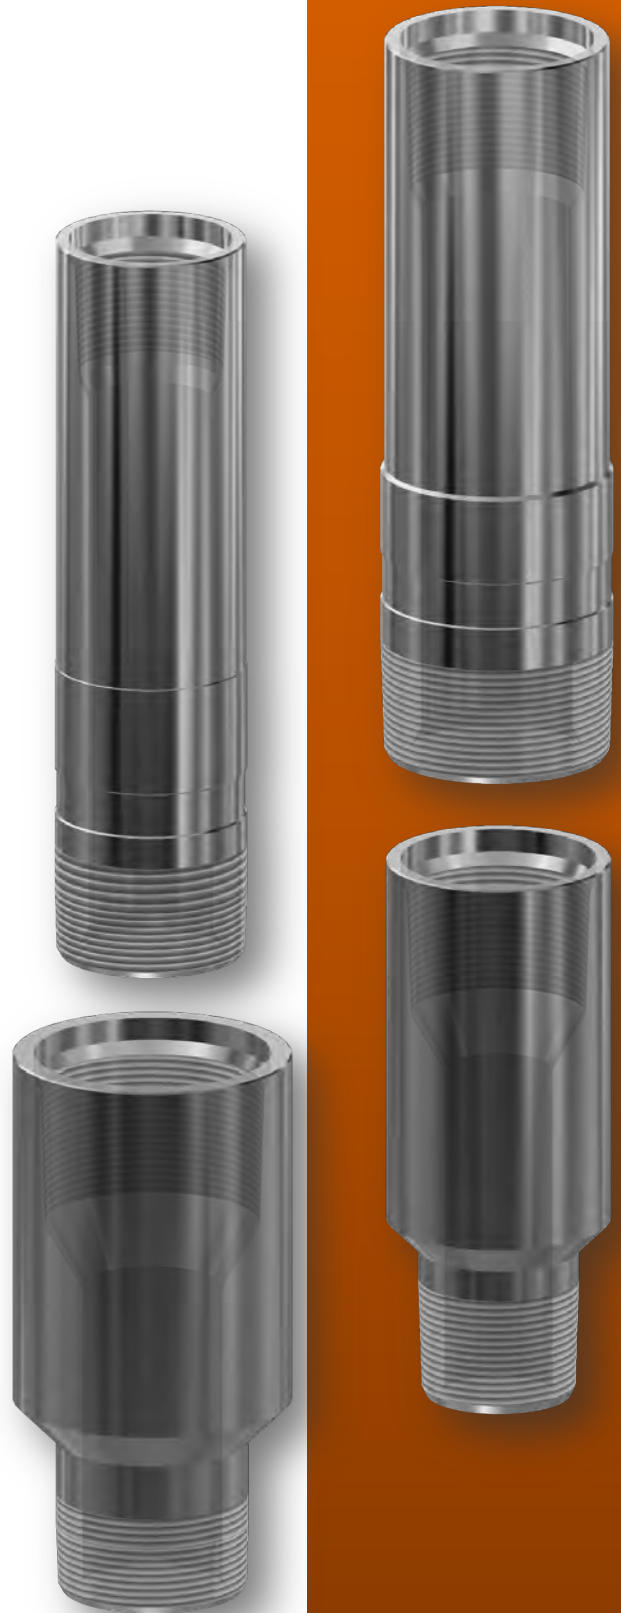

TriaxisOilTools.com

sales@trixisoiltools.com

+1 780.933.4773

Triaxis Oil Tools, Inc.

Nisku, Alberta

©2023 Triaxis Oil Tools Inc., All rights reserved.

DS23-010 R00